



GLOBAL STANDARD
VERTICAL MACHINING CENTER

DNM

4500/L • 5700/L • 6700/L/XL



DN SOLUTIONS

DNM SERIES

4500/L • 5700/L • 6700/L/XL

Building on the legacy of the proven and successful DNM and DNM II series, the new version DNM series boasts even greater reliability and improved performance. In addition, the new series includes grease lubrication to the roller guideways which is more environmentally-friendly. The design concepts underpinning the DNM 4500/5700/6700 series are high speed, high rigidity and suitability for all applications.



Standard features include the largest machining envelope in its class, direct coupled spindles, roller guideways and thermal compensation to deliver high precision.



A HIGHLY VERSATILE VERTICAL MACHINING CENTER WITH THE LARGEST MACHINING ENVELOPE IN ITS CLASS

- DNM series machines have larger tables with increased Y-axis travels and increased maximum table loads.
- DNM machines with longer X-axes (i.e., DNM 4500L, 5700L, 6700L/XL), are available.

STANDARD DIRECT-COUPLED SPINDLE FOR HIGHER PRODUCTIVITY

- Directly coupled spindles reduce vibration and noise, thereby improving the machines' performance and making them more environmentally-friendly compared to belt driven machines.
- High-torque and high speed spindles are available for the machining of different materials.
- Higher productivity is achieved by reducing tool change times and by improving acceleration and deceleration rates.

AN ENVIRONMENTALLY-FRIENDLY MACHINE DESIGNED FOR STABLE AND EASY OPERATION

- Thermal error compensation system supplied as standard optimizes machine accuracy by reducing the effects of heat build-up during extended periods of operation.
- The EZ work function can be checked in the pop-up window on the NC main screen for convenience.
- Grease lubrication for the axis roller guideways is a standard feature and helps reduce contamination.

BASIC STRUCTURE

Designed with a highly stable and rigid structure, the new DNM series provides customers with machines with different Y-axis capabilities (from 450mm to 670mm), enabling the machining of a wider range of workpieces.

Travel distance (X / Y / Z axis)

DNM 4500/L

800{910} / 450 / 510 mm

31.5{35.8} / 17.7 / 20.1 inch

DNM 5700/L

1050{1300} / 570 / 510 mm

41.3{51.2} / 22.4 / 20.1 inch



DNM 6700/L/XL

1300{1500/2100}

/ 670 / 625 mm

51.2{59.1/82.7}

/ 26.4 / 24.6 inch

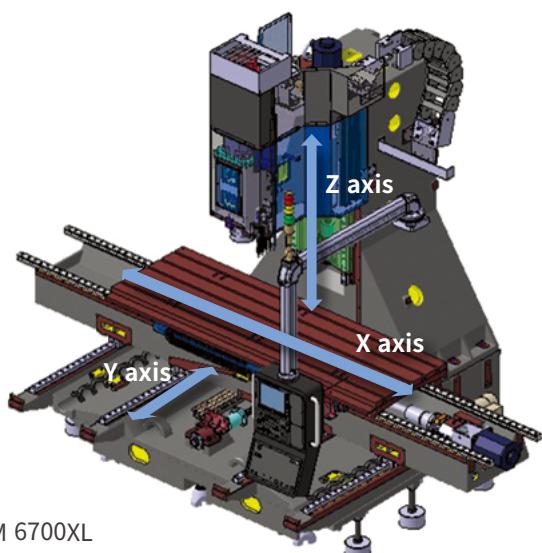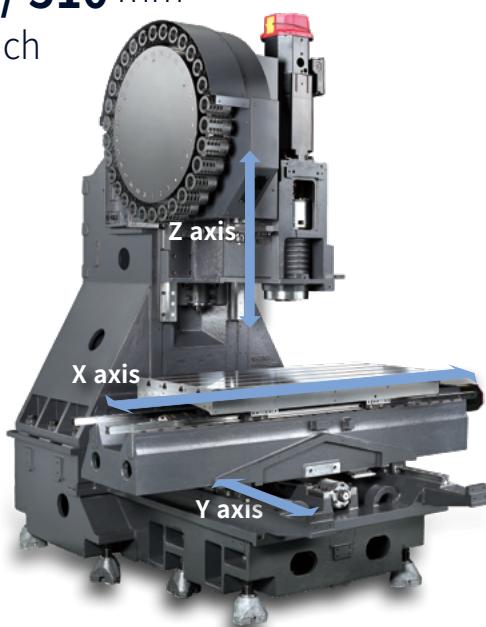

DNM 6700XL

Axis system

Environmentally-friendly grease lubrication is adopted as standard for all the axis feed systems, and roller-type LM guides are used to enhance rigidity.

Rapid traverse rate (X / Y / Z axis)

DNM 4500 / 5700 / 6700 / 6700L

36 / 36 / 30 m/min



(1417.3 / 1417.3 / 1181.1 ipm)

DNM 6700XL

30 / 30 / 30 m/min

(1181.1 / 1181.1 / 1181.1 ipm)

Roller-type LM Guides are provided as a standard feature.

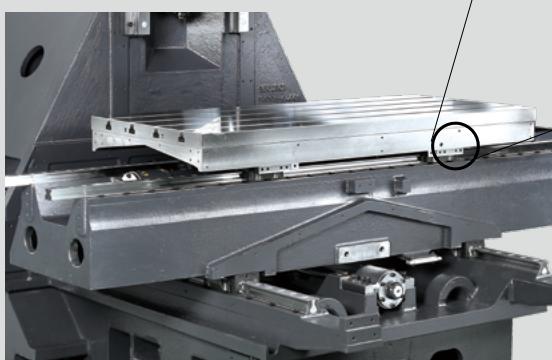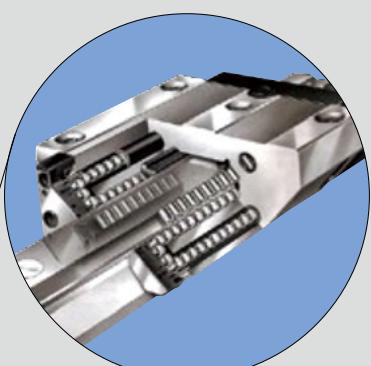

Grease lubrication for all axes is a standard feature.

SPINDLE | TABLE

Directly-coupled spindles have been adopted as a standard feature to further reduce vibration and noise and enhance productivity, increase accuracy and improve the working environment. High-torque and high speed spindle options for machining different materials are available.

Max. spindle speed

8000 r/min

12000 r/min option

15000 r/min option

Max. spindle motor power

18.5 kW 24.8 Hp


Max. spindle motor torque

117.8 N·m 86.9 lbf-ft

(8000 r/min, 12000 r/min,
15000 r/min)

286 N·m 211.1 lbf-ft option

(8000 r/min high torque
version)

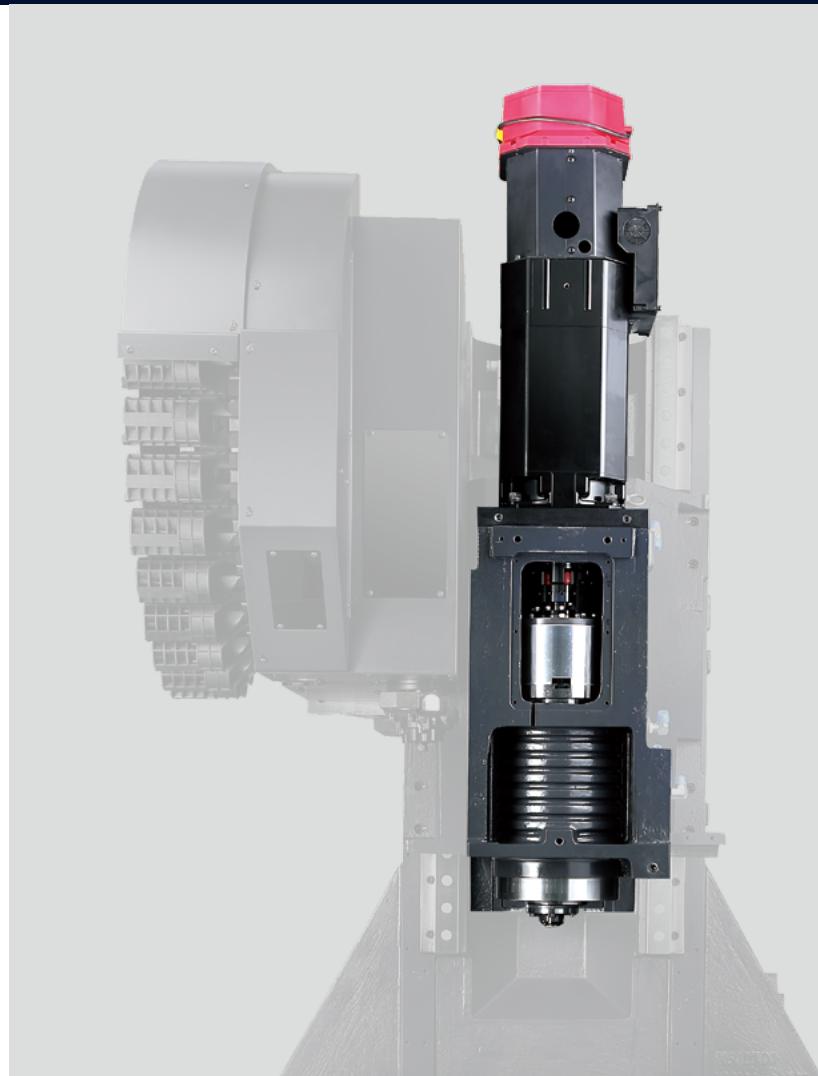

TABLE

Increased table sizes and table load capacities are provided within the same floor space of the previous models.

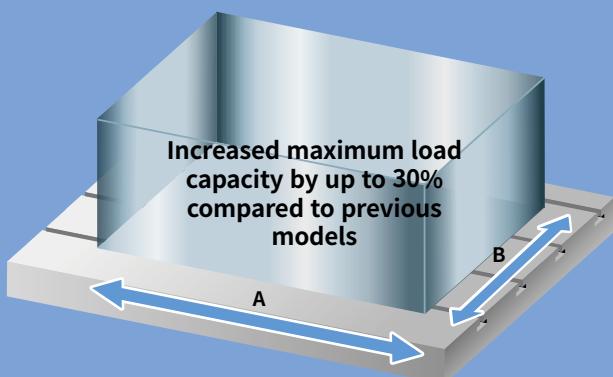


Table size (A x B)

DNM 4500/L

1000/1050 x 450 mm

39.4{41.3} x 17.7 inch

DNM 5700/L

1300/1500 x 570 mm

51.2{59.1} x 21.3 inch

DNM 6700/L/XL

1500/1600/2200 x 670 mm

59.1{63.0/86.6} x 26.4 inch

Max weight on Table

DNM 4500/4500L

DNM 5700/5700L

600 kg 1322.8 lb **1000** kg 2204.6 lb

DNM 6700/6700L/6700XL

1300 kg 2866.0 lb

MACHINING PERFORMANCE


The DNM series delivers the best cutting performance in its class and ensures highest levels of productivity.

Cutting performance

High-rigidity machining can be undertaken with speed and precision.


Face mill (ø80mm (3.15 inch)) Carbon steel (SM45C)

Chip removal rate cm ³ /min (inch ³ /min)	Spindle speed r/min	Feedrate mm/min (ipm)
527 (32.2)	1500	2700 (106.3)

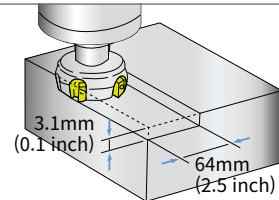


Face mill (ø80mm (3.15 inch)) Aluminium(AL6061)

Chip removal rate cm ³ /min (inch ³ /min)	Spindle speed r/min	Feedrate mm/min (ipm)
1901 (116.0)	1500	5940 (233.9)

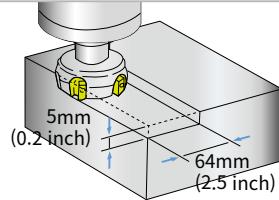


End mill (ø30mm (i.2 inch)) Carbon steel (SM45C)

Chip removal rate cm ³ /min (inch ³ /min)	Spindle speed r/min	Feedrate mm/min (ipm)
48 (2.9)	222	107 (4.2)

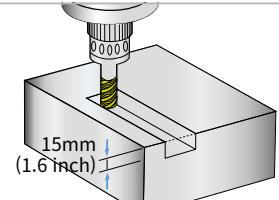

U-Drill (ø50mm (2.0 inch)) Carbon steel (SM45C)

Chip removal rate cm ³ /min (inch ³ /min)	Spindle speed r/min	Feedrate mm/min (ipm)
501 (30.6)	1500	255 (10.0)

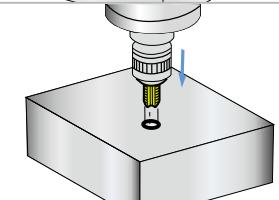

Tap Carbon steel (SM45C)

Tap size mm	Spindle speed r/min	Feedrate mm/min (ipm)
M 36 x P 4.0	221	884 (34.8)

*The results, indicated in this catalogue, are provided as examples only. They may not always be achieved owing to different cutting and environmental conditions.

High Productivity

Sample work

Material	Aluminium (AL6061)
Material size	561 x 210 x 30 mm (22.1 x 8.3 x 1.2 inch)
Using tools	18 ea


Previous model	Non-cutting time	Cutting time	Run hours
	14min. 31sec.	37min. 20sec.	51min. 51sec.
Reduced by	17 %		Reduced by 5 %
New DNM series	12min. 6sec.	37min. 20sec.	49min. 26sec.

*The results, indicated in this catalogue, are provided as examples only. They may not always be achieved owing to different cutting and environmental conditions.

6

TOOL CHANGE SYSTEM

Tool changers have been optimized to reduce non cutting times. The highly-reliable tool magazine can accommodate up to 30 tools as standard.

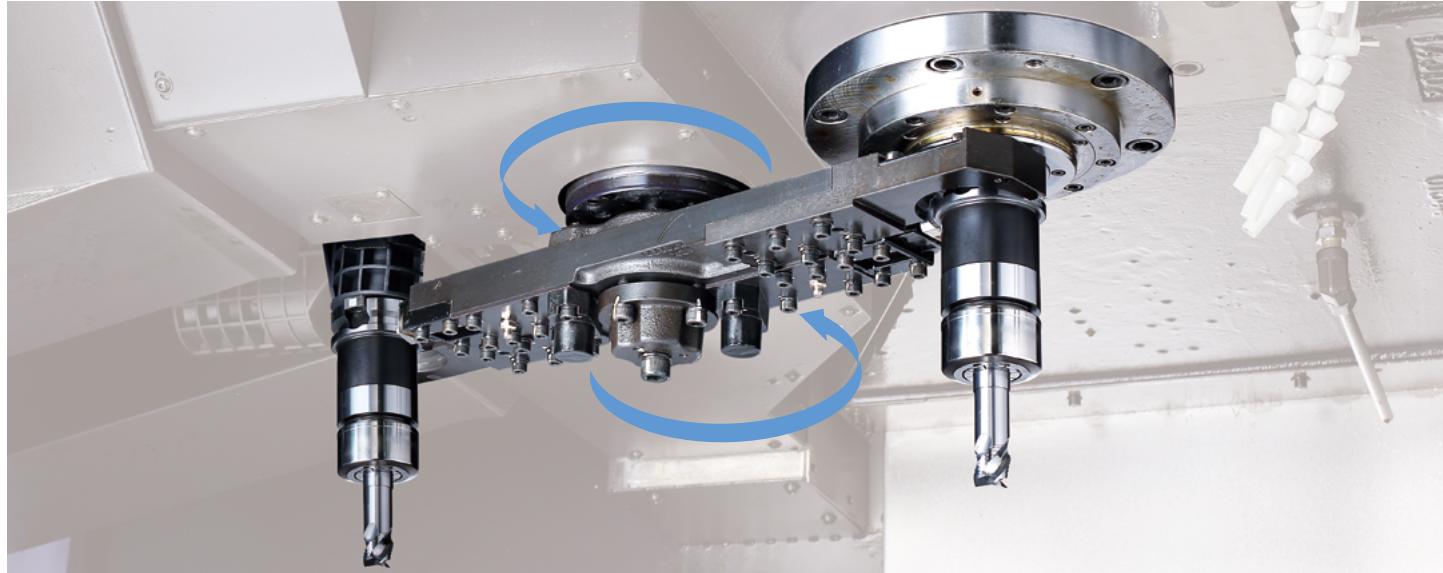


Tool to Tool time

1.2 S

Chip to Chip* time

3.2 S

* The Chip-to-Chip time has been tested in accordance with DN Solutions's strict testing procedures, but may vary depending on the user's operating conditions.

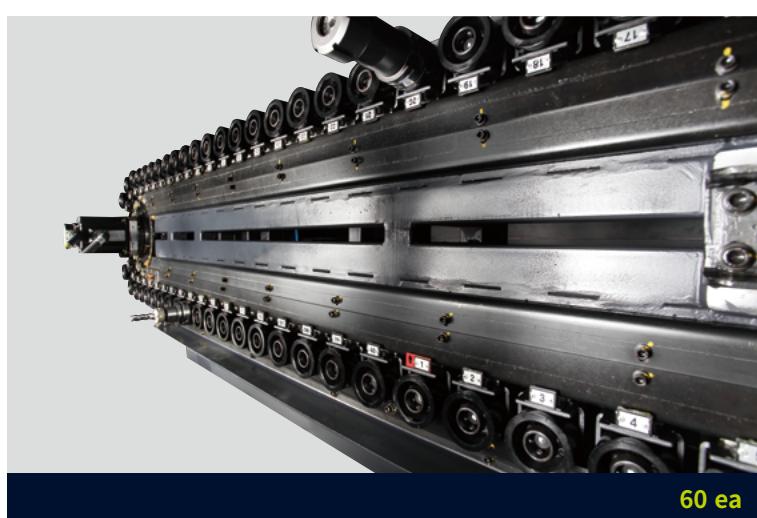

Tool storage capacity

30 ea

40 ea option

60 ea option

STANDARD | OPTIONAL SPECIFICATIONS

Various optional features are available to meet customers' specific machining requirements and applications.

Description	Features	DNM 4500/L	DNM 5700/L	DNM 6700/6700L/XL	
Spindle	8000 r/min (Unit: kW(Hp), N·m(lbf-ft))	18.5/11(24.8/14.8), 117.8(86.9) FANUC 18.5/15 (24.8/20.1), 117.8(86.9) FANUC 15/11 (20.1/14.8), 286(211.1) FANUC 18.5/11(24.8/14.8), 117.8(86.9) FANUC 17/10 (22.8/13.4), 108.6(80.1) HEIDENHAIN 32/15 (42.9/20.1), 203.7(150.3) HEIDENHAIN	● X ○ ○ ○ ○ ○ ○ ○	● X ○ ○ ○ ○ ○ ○ ○	X ● ○ ○ ○ X ○ X ○
	12000 r/min (Unit: kW(Hp), N·m(lbf-ft))	16.5/11 (22.1/14.8), 141(104.1) SIEMENS 21.8/16.3 (29.2/21.9), 150.1(110.8) SIEMENS	○ X	○ X	○ X
	15000 r/min (Unit: kW(Hp), N·m(lbf-ft))	18.5/11(24.8/14.8), 117.8(86.9) FANUC 17/10 (22.8/13.4), 108.2 (79.9) HEIDENHAIN 16.5/11 (22.1/14.8), 141.3 (104.3) SIEMENS	○ ○ ○	○ ○ ○	○ ○ ○
	Tool storage capacity	30 ea 40 ea 60 ea	● ○ ○	● ○ ○	● ○ ○
	BIG PLUS BT40		●	●	●
	BIG PLUS CAT40		○	○	○
	BIG PLUS DIN40		○	○	○
	150 mm (5.9 inch)		○	○	○
	200 mm (7.9 inch)		○	○	○
	300 mm (11.8 inch)		○	○	○
Coolant	FLOOD	0.19 MPa(27.6 psi), 0.4 kW(0.5 Hp) 0.69 MPa(100.1 psi), 1.8 kW(2.4 Hp)	● ○	● ○	● ○
	None		●	●	●
	TSC**	2 MPa(290.1 psi), 1.5kW(2.0 Hp) 2 MPa(290.1 psi), 4 kW(5.4 Hp) 7 MPa(1015.3 psi), 5.5 kW(7.4 Hp)	○ ○ ○	○ ○ ○	○ ○ ○
	FLUSHING		○	○	○
	SHOWER (200 L/min (52.8 gal/min))		○	○	○
Chip disposal	Chip conveyor	Chip pan Hinged type (Left/Right/Rear) Magnetic scraper type (Left/Right/Rear) Screw(AUGER) type (Left/Right)	● ○ ○ ○	● ○ ○ ○	● ○ ○ ○
	Chip bucket		○	○	○
	Linear scale	X / Y / Z axis	○	○	○
Precision machining option	AICC II (200 block)		●	●	●
	SSP (Smooth Surface Package)		○	○	○
Measurement & Automation	Automatic tool measurement	TS27R_RENISHAW	○	○	○
	Automatic tool breakage detection	OTS_RENISHAW	○	○	○
	Automatic workpiece measurement	OMP60_RENISHAW	○	○	○
	Automatic front door with safety device		○	○	○
	WORK LIGHT	LED LAMP	●	●	●
Accessories	OPERATOR CALL LAMP	3-COLOR SIGNAL TOWER(LED)	●	●	●
	LEVELING BLOCK & BOLT	-	●	●	●
	SMART THERMAL CONTROL	SENSORLESS TYPE(ONLY SPINDLE)	●	●	●
	ASSEMBLY & OPERATION TOOLS KIT	-	●	●	●
	4TH AXIS PREPARATION CABLING FOR SERVO/1-PNEUMATIC PIPING	FACTORY READY MADE	○	○	○
	AIR GUN		○	○	○
	Air blower		○	○	○
	Coolant gun		○	○	○
	Mist collector		○	○	○
Customized Special Option	ANCHORING ⁽¹⁾	SLIDE CLAMP & CHEMICAL ANCHOR BOLT	○	○	○
	TSA ⁽²⁾	0.54	○	○	○
	TOOL TYPE	HSK63A	○	○	○
	ATC AUTO SHUTTER	30TOOL / 40TOOL	○	○	○
	ATC FULL COVER	30TOOL / 40TOOL	○	○	○
	Drum chipconveyor	HINGE TYPE SCRAPER TYPE	○ ○	○ ○	○ ○
	Oil lubrication	X, Y, Z AXIS	○	○	○
	20 Bar TSC with inverter	50Hz → 60Hz	○	○	○
	FINE DUST PROTECTING PACKAGE	WET MACHINING	BELLOWS COVER(X/Y/Z) PROTECT COVER(X-AXIS) BALL SCREW BELLOWS COVER(X/Y) GUIDE WAY DOUBLE WIPER	○ ○ ○ ○	○ ○ ○ ○
		DRY MACHINING	PROTECT COVER(X-AXIS) BALL SCREW BELLOWS COVER(X/Y) GUIDE WAY DOUBLE WIPER AIR OIL SUCTION(ONLY 15k SPINDLE)	○ ○ ○ ○	○ ○ ○ ○
			ATC FULL CLOSED COVER	○	○
			RENISHAW / LTS	○	○
	AUTO TOOL LENGTH MEASUREMENT	MSC/BK9(NEEDLE TYPE ON MAGAZINE)	○	○	○
	AUTO TOOL BREAKAGE DETECTION		○	○	○


* Please contact DN Solutions for detailed specification information.

** If this option is selected, the TSA(Through Spindle Air) Max.pressure is 0.54MP

(1) Please refer to foundation drawing in relation to anchoring. If more detailed information is required consult with DN Solutions service

(2) If TSC is not required - TSA can be selected as an option.

● Standard ○ Optional X Not applicable



There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting the controlled and careful use of coolants and modifying the machine without the consent of the manufacturer. Always check the SAFETY GUIDELINES carefully before using the machine.

PERIPHERAL EQUIPMENT

Grease lubrication system

The standard grease lubrication system eliminates the need for an oil skimmer and reduces lubrication costs by about 60% compared to oil lubrication.

Yearly maintenance cost

Reduced by
Max. 60%




Raised column option



When the distance between the table and the spindle nose needs to be extended, for example, to accommodate a fixture or a rotary table, the solid one-piece raised column can be raised to increase the distance required.

Height

150/200/300 mm
5.9/7.9/11.8 inch

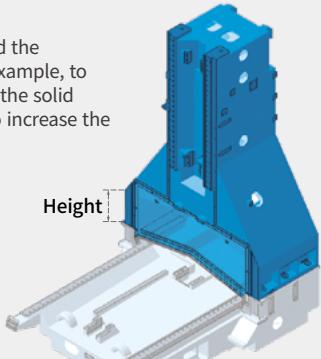

Chip conveyor option

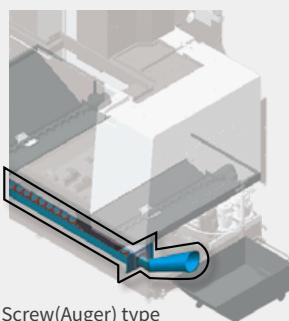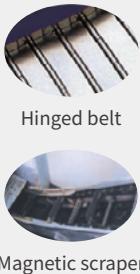

Chip conveyor type

Material

Description

Chip conveyor type	Material	Description
Hinged belt	Steel	Hinged belt chip conveyor, which is most commonly used for steel work [for cleaning chips longer than 30mm(1.2inch)], is available as an option.
Magnetic scraper	Cast Iron	Magnetic scraper type chip conveyor, which is ideal for die-casting work [for cleaning small chips], is available as an option.
Screw(Auger) type	Steel	Screw(Auger) type chip conveyor is suitable for minimizing installation space. About 85% floor space is required to install Screw(Auger) type chip conveyor compared to Hinged belt type.


Chip bucket option

Capacity 300 L (79.3 gal)




Hydraulic / Pneumatic fixture line option

The user should prepare pipelines for hydraulic/pneumatic fixtures whose detailed specifications should be determined through discussions with DN Solutions.

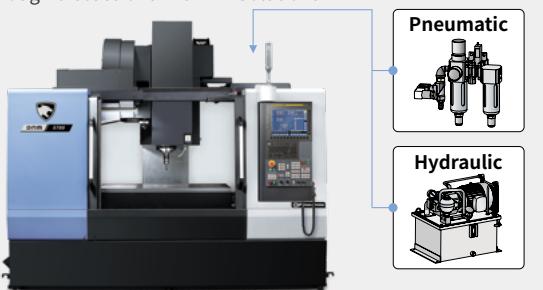


4 axis rotary table option

The high-precision split system with its compact and highly rigid design, and double piston structure enables vertical and horizontal use and delivers a strong clamping force.

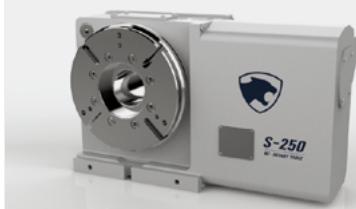

ATC shutter door option

An ATC shutter door can be applied instead of the brush mechanism to provide a higher level of protection from potential chip ingress.





AWC system option

A compact automatic workpiece change system



Max. workpiece dimensions	Unit	Count	Max. loading	Max. construction height on the pallet
250 x 250 (9.8x9.8) or ø 300 (11.8)	mm (inch)	12	130kg (286.6lb)	350mm (13.8inch)
320 x 320 (12.6x12.6) or ø 360 (14.2)	mm (inch)	10		
350 x 350 (13.8x13.8) or ø 400 (15.7)	mm (inch)	8		
400 x 400 (15.7x15.7) or ø 450 (17.7)	mm (inch)	6	250kg (551.1lb)	
500 x 500 (19.7x19.7) or ø 550 (21.7)	mm (inch)	4		

Pallet Storage-Table Configuration

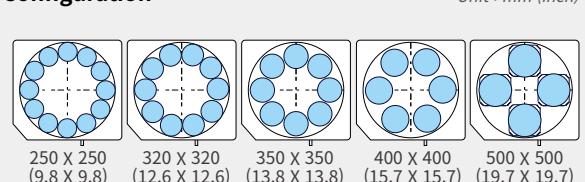

DN SOLUTIONS FANUC i PLUS

DN Solutions Fanuc i Plus is optimized for maximizing customer productivity and convenience.

15 inch screen + new operation panel

DN Solutions Fanuc i Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout, and features the Qwerty keyboard for fast and easy operation.



DN Solutions Fanuc i Plus

- 15 inch color display
- Intuitive and user-friendly design

USB & PCMCIA card

QWERTY keyboard

- EZ-guide i standard
- Ergonomic operator panel
- 2MB Memory
- Hot key



iHMI touchscreen

option

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.

Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.

NUMERIC CONTROL SPECIFICATIONS

FANUC

Item	Specifications	DN Solutions Fanuc i (0i Plus) DNM 4digit
Controlled axis	Controlled axes Simultaneously controlled axes Additional controlled Axis	3 (X,Y,Z) 4 axes
	Fast data server	●
Data input/output	Memory card input/output USB memory input/output	○
	Large capacity memory(2GB)*2	●
	Embedded Ethernet	●
Interface function	Fast Ethernet	○
	Enhanced Embedded Ethernet function	●
Operation	DNC operation	●
	DNC operation with memory card	●
	Workpiece coordinate system	●
Program input	Addition of workpiece coordinate system	●
	Tool number command	T4 digits
	Tilted working plane indexing command	○
Feed function	AI contour control I	X
	AI contour control II	●
	AI contour control II	X
	AI contour control II	X
	High smooth TCP	X
Operation guidance function	EZ Guidei (Conversational Programming Solution)	●
	iHMI with Machining Cycle	X
	EZ Operation package	●
Setting and display	CNC screen dual display function	●
Network	FANUC MTConnect	★
	FANUC OPC UA	★
	Display unit	X X 15" color LCD
Others	Part program storage size & Number of registerable programs	10.4" color LCD 15" color LCD with Touch Panel 640M(256KB)_500 programs 1280M(512KB)_1000 programs 2560M(1MB)_1000 programs 5120M(2MB)_1000 programs 10240M(4MB)_1000 programs 20480M(8MB)_1000 programs 2560M(1MB)_2000 programs 5120M(2MB)_4000 programs 10240M(4MB)_4000 programs 20480M(8MB)_4000 programs

*1) The number of look-ahead blocks may be changed or limited depending on the peripheral device or the configuration of the internal NC system.

*2) Available Option only with Fanuc i plus iHMI


● Standard ○ Optional X N/A ★ Available
Network: FANUC MT Connect and FANUC OPC UA available.

EZ WORK

The software developed by DN Solutions provides a range of different functions designed for fast, efficient and convenient operation.

EZ work

The EZ work package delivers speed and efficiency. This menu-driven innovation not only helps customers reduce setup times, but also simplifies common tasks and procedures, reducing the potential for errors. EZ work reduces operating time, protects machinery, enhances quality and speeds up maintenance interventions.

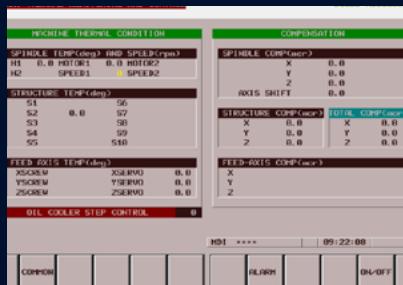

Thermal Compensation

A function to maintain high-precision machining quality by analyzing and correcting the amount of thermal displacement of a structure through a temperature sensor




M/G-Code List

Functional description of M code and G code



Tool Management

Function to manage tool information [Tool information / Tool No. / Tool condition (normal, large diameter, worn / damaged, used for the first time, manual) / Tool name]

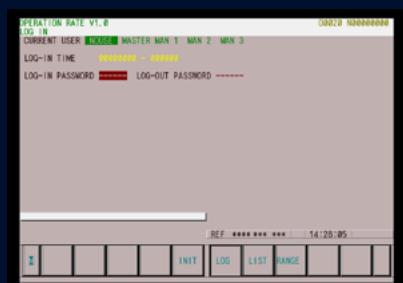

Operation Rate

Machine operation history management function by date based on load



Adaptive Feed Control

Function to control feedrate so that the cutting can be carried out at a constant load (To adapt to the spindle load set up with constant load feedrate control function)




Spindle Warm Up

A function that assists spindle warm-up for spindle life when the spindle has not been used for a certain period of time



ATC Recovery

Function to view detailed info with recommended actions and to perform step-by-step operation manually (when an alarm is triggered during an ATC operation)

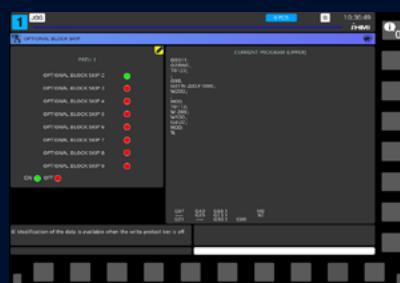

Addition of Optional Block Skip

In addition to the OPTIONAL BLOCK SKIP of the operation panel, the function to skip a specific block selected in the machining program


CONVENIENT OPERATION

HEIDENHAIN TNC620


Superior hardware specifications

The TNC 620 features optimized motion control, short block processing times and special control strategies. Together with its uniform digital design and its integrated digital drive control (including inverters), it enables you to achieve high machining speeds and the best possible contour accuracy.

- 15.6" display
- 21GB Storage memory
- 1024 look ahead blocks
- High user convenience with folder structure data management

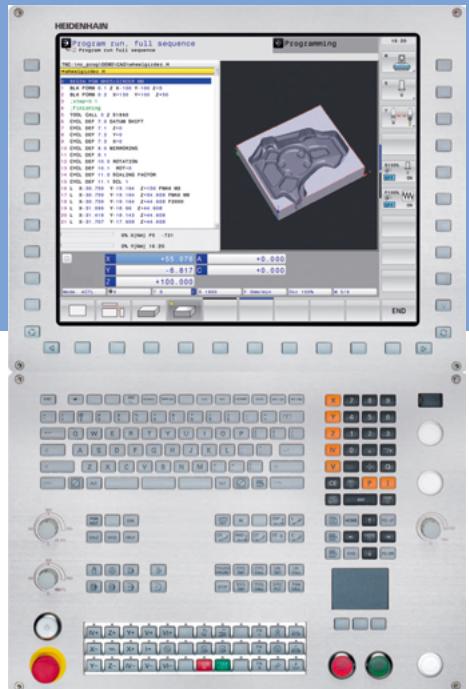


Conversational convenient function

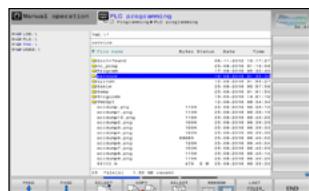

Data are controlled in the folder structure; convenient communication via USB devices




KinematicOpt & KinematicComp option
(Touch probe cycle for automatic measurement)

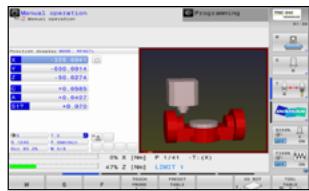


Collision protection system
option



Adaptive feed control option

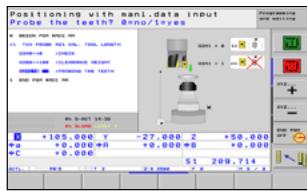

Various built-in pattern cycles
for a wider scope of application
(Software standard)

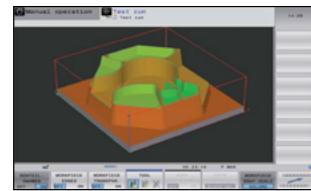

Graphic simulation

NUMERIC CONTROL SPECIFICATIONS



Item	Specifications	TNC620 DNM
Controlled axis	Controlled axis	3 (X,Y,Z)
	Simultaneously controlled axis	4 axis
Data input/output	USB memory input/output	●
Interface function	Embedded ethernet	●
Feed function	Look-ahead	5000 blocks
Axis compensation	KinematicsOpt	Automatic measurement and optimization of machine kinematics
Collision monitoring	Dynamic collision monitoring (DCM)	X
Network	MTConnect	★
Others	Display unit	15" color LCD
	Part program storage size & number of registerable programs	1.8GB

● Standard ○ Optional X Not Available ⚡ Available

CONVENIENT OPERATION

SIEMENS 828D


15.6" screen + new operation panel

The newly-designed operation panel improves the customer convenience by incorporating and using common-design buttons and layouts, and includes the familiar QWERTY keyboard for fast and easy operation.


- 15.6" display
- 10MB high capacity user memory
- USB & ethernet (standard)
- QWERTY keyboard (standard)
- High-speed calculation and simulation can be fulfilled by improved processor functionality




Conversational convenient function

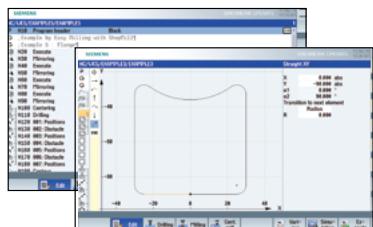


Shop Mill Part Programming

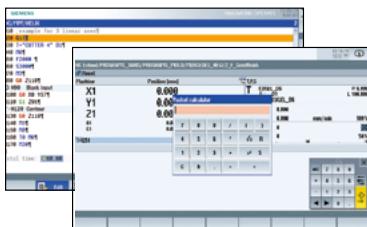


Smart function

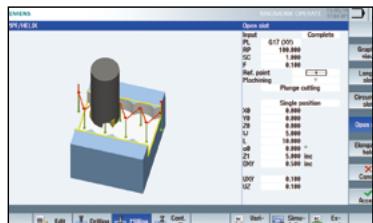

Advanced program language
programGUIDE

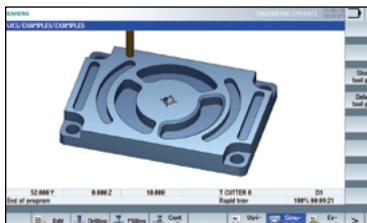

Simulation and machining contour monitoring

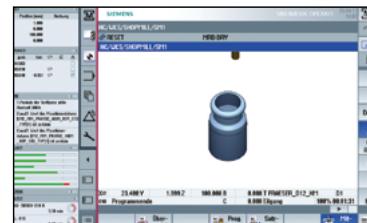

Side screen widget

NUMERIC CONTROL SPECIFICATIONS

SIEMENS

	Item	Specifications	S828D DNM
Controlled axis	Controlled axes (제어축수) Simultaneously controlled axes (동시 제어축수)	- -	3축 3축
Data input/output	Memory card input/output USB memory input/output	(Local drive)	X
Interface function	Ethernet	(X130)	●
Operation	On network drive On USB storage medium, e.g. memory stick	(without EES option, Extcall) (without EES option, Extcall)	○ ●
Program input	Workpiece coordinate system Addition of workpiece coordinate system	G54 - G57 G505 - G599	● ●
Interpolation & Feed function	Advanced surface Top surface Look ahead number of block	S/W version 4.8	○ ○ 450
Programming & Editing function	3D simulation, finished part Simultaneous recording Measure kinematics DXF Reader for PC integrated in SINUMERIK Operate	● ● X ○	● ● X ●
Operation Guidance Function	ShopMill EZ Work	● ●	● ●
Setting and display	Operation via a VNC viewer	●	●
Network	MTConnect OPCUA	✖ ○	✖ ●
Etc. function	15.6" color display with touch screen 19" color display without touch screen 21.5" color display with touch screen CNC user memory Expansion by increments Collision avoidance Collision avoidance ECO (machine, working area)	10 MB 2 ~ 12 MB	● ○ X ● X X


POWER | TORQUE

FANUC

DNM 4500/L, DNM 5700/L


8000 r/min

Max. spindle power: 18.5 kW (24.8 Hp)
Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

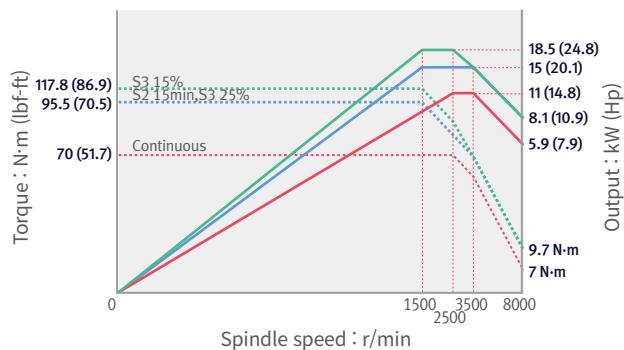

8000 r/min **option**


Max. spindle power: 15 kW (20.1 Hp)
Max. spindle torque: 286 N·m (211.1 lbf-ft)

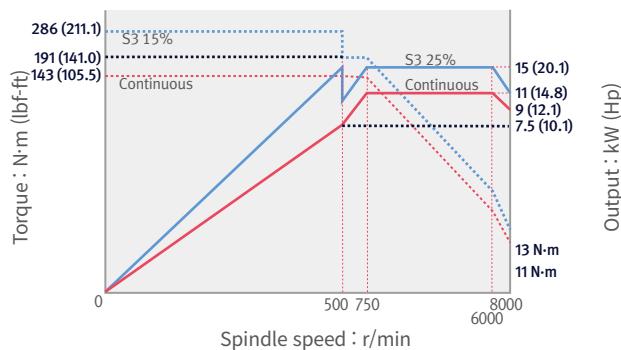

DNM 6700/L/XL


8000 r/min

Max. spindle power: 18.5 kW (24.8 Hp)
Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

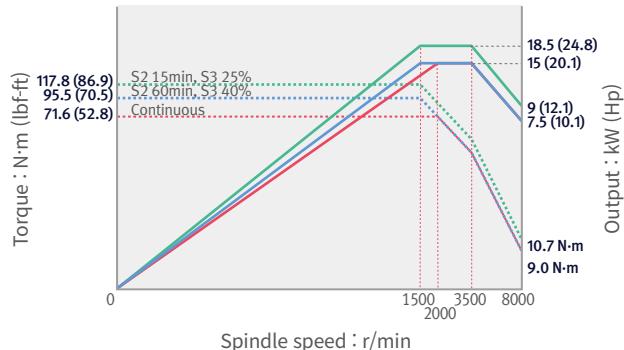

8000 r/min **option**


Max. spindle power: 15 kW (20.1 Hp)
Max. spindle torque: 286 N·m (211.1 lbf-ft)

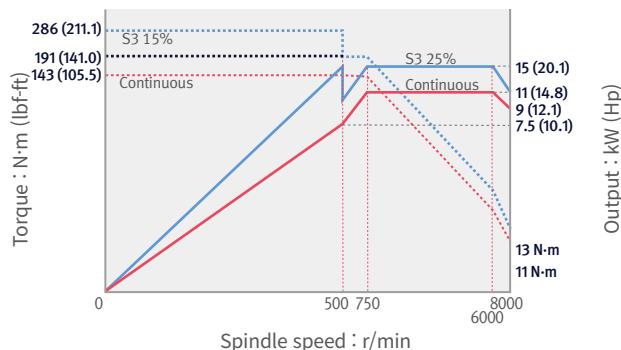

DNM 4500/L, 5700/L, 6700/L/XL


12000 r/min **option**

Max. spindle power: 18.5 kW (24.8 Hp)
Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

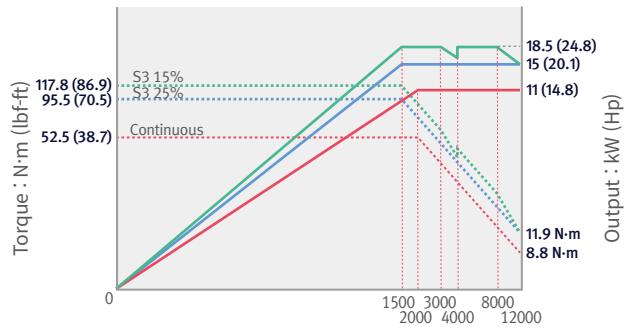

15000 r/min **option**

Max. spindle power: 18.5 kW (24.8 Hp)
Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

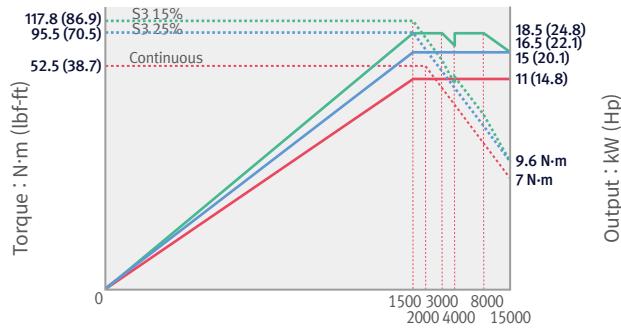

POWER | TORQUE


SIEMENS

DNM 4500/L, DNM 5700/L

12000 r/min

Max. spindle power: 16.5 kW (22.1 Hp)

Max. spindle torque: 141.3 N·m (104.3 lbf-ft)

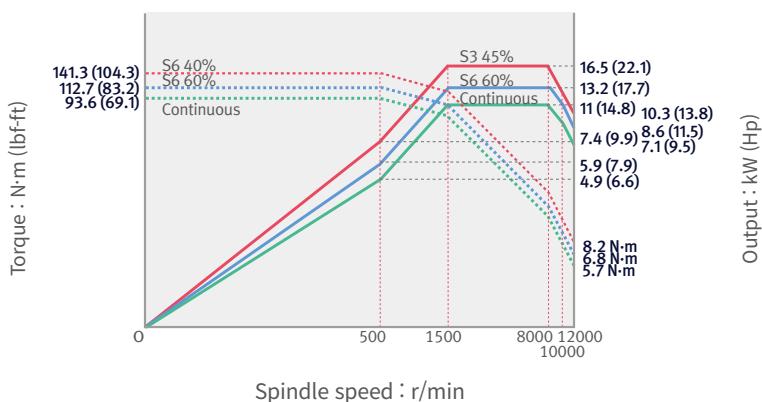


DNM 6700/L/XL

12000 r/min

Max. spindle power: 21.8 kW (29.2 Hp)

Max. spindle torque: 150.1 N·m (110.8 lbf-ft)

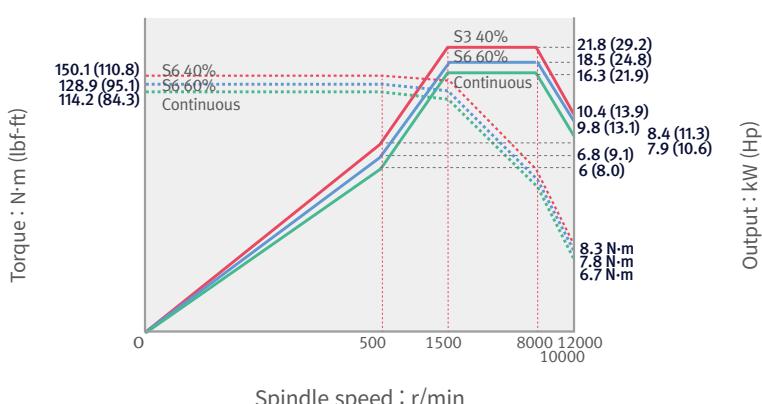


DNM 4500/L, 5700/L, 6700/L/XL

15000 r/min

Max. spindle power: 16.5 kW (22.1 Hp)

Max. spindle torque: 141.3 N·m (104.3 lbf-ft)

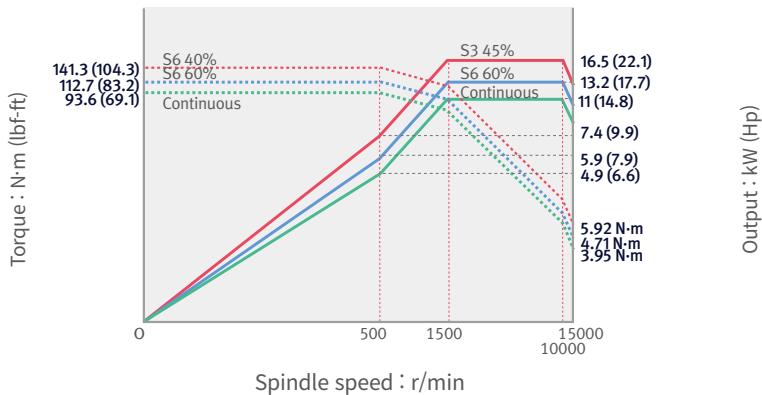

POWER | TORQUE


HEIDENHAIN | MITSUBISHI

HEIDENHAIN DNM 4500/L, DNM 5700/L

12000 r/min

Max. spindle power: 17 kW (22.8 Hp)

Max. spindle torque: 108.2 N·m (79.9 lbf-ft)

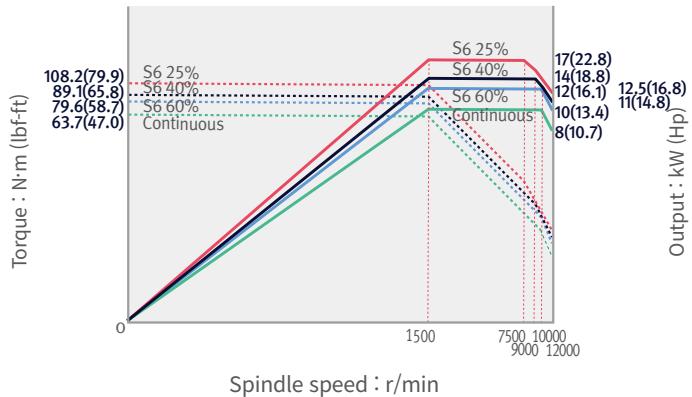

HEIDENHAIN DNM 6700/L/XL

12000 r/min


Max. spindle power: 32 kW (42.9 Hp)

Max. spindle torque: 203.7 N·m (150.2 lbf-ft)

15000 r/min option

Max. spindle power: 17 kW (22.8 Hp)

Max. spindle torque: 108.2 N·m (79.9 lbf-ft)

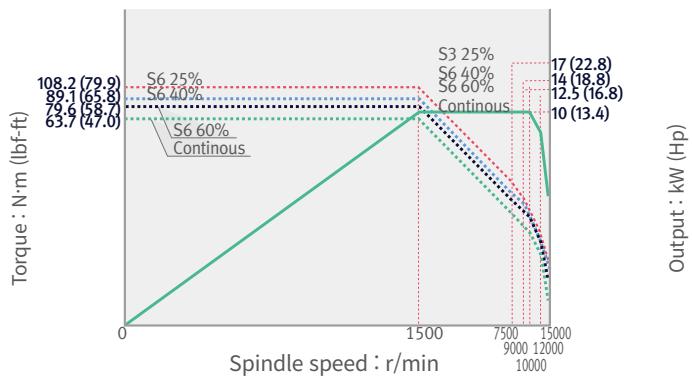


MITSUBISHI DNM 4500/L, 5700/L, 6700/L/XL

12000 r/min option

Max. spindle power: 18.5 kW (24.8 Hp)


Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

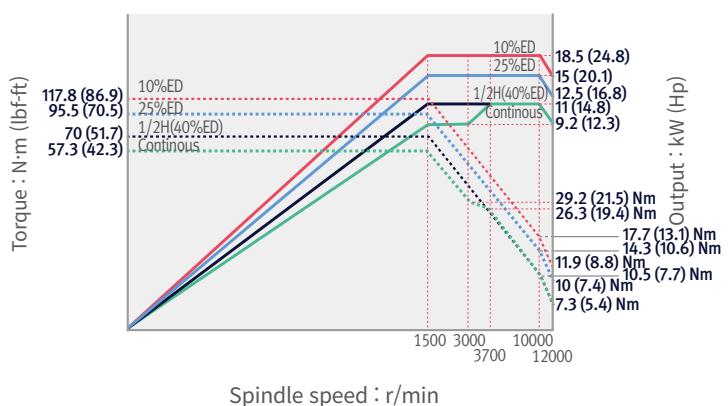

DIMENSIONS

DNM 4500/5700/6700 series

Units : mm (inch)

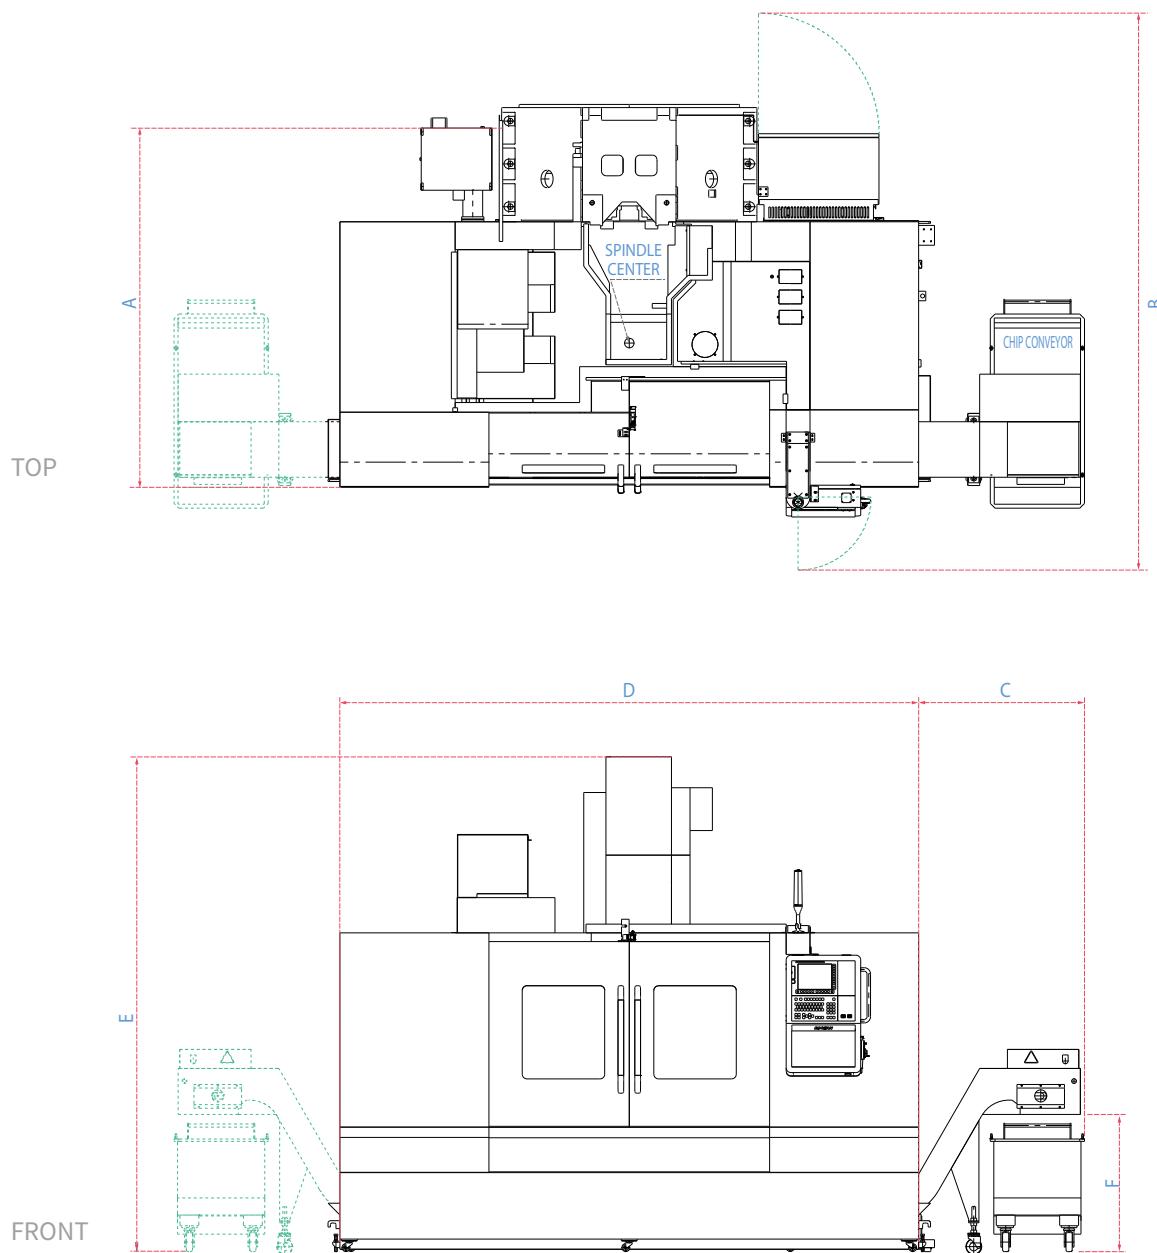

Model	A (Length)	B	C	D (Width)	E (Height)	F		
						SCRAPER	HINGED	SCREW
DNM 4500	1970 (77.6)	3200 (126.0)	1040 (415) [40.9(16.3)]	2465 (97.0)	2985 (117.5)	883 (34.8)	865 (34.1)	440 (17.3)
DNM 4500L	1970 (77.6)	3200 (126.0)	1040 (415) [40.9(16.3)]	2550(100.4)	2985 (117.5)	883 (34.8)	865 (34.1)	440 (17.3)
DNM 5700	2225 (87.6)	3365 (132.5)	1040 (415) [40.9(16.3)]	2960 (116.5)	2985 (117.5)	883 (34.8)	865 (34.1)	440 (17.3)
DNM 5700L	2225 (87.6)	3365 (132.5)	1040 (415) [40.9(16.3)]	3200 (126.0)	2985 (117.5)	883 (34.8)	865 (34.1)	440 (17.3)
DNM 6700	2415 (95.1)	3510 (138.2)	1040 (415) [40.9(16.3)]	3200 (126.0)	3120 (122.8)	883 (34.8)	865 (34.1)	440 (17.3)
DNM 6700L	2415 (95.1)	3510 (138.2)	1040 (415) [40.9(16.3)]	3650 (143.7)	3120 (122.8)	883 (34.8)	865 (34.1)	440 (17.3)

① Max. machine length (including electric cabinet door and operation panel swiveling)


② Additional width to accommodate the side chip conveyor. [] indicates the additional width required to accommodate a screw(auger)type chip conveyor.

* Some peripheral equipment can be placed in other places *Rear chipconveyor need discuss with sales person

DIMENSIONS

DNM 6700XL

Units : mm (inch)

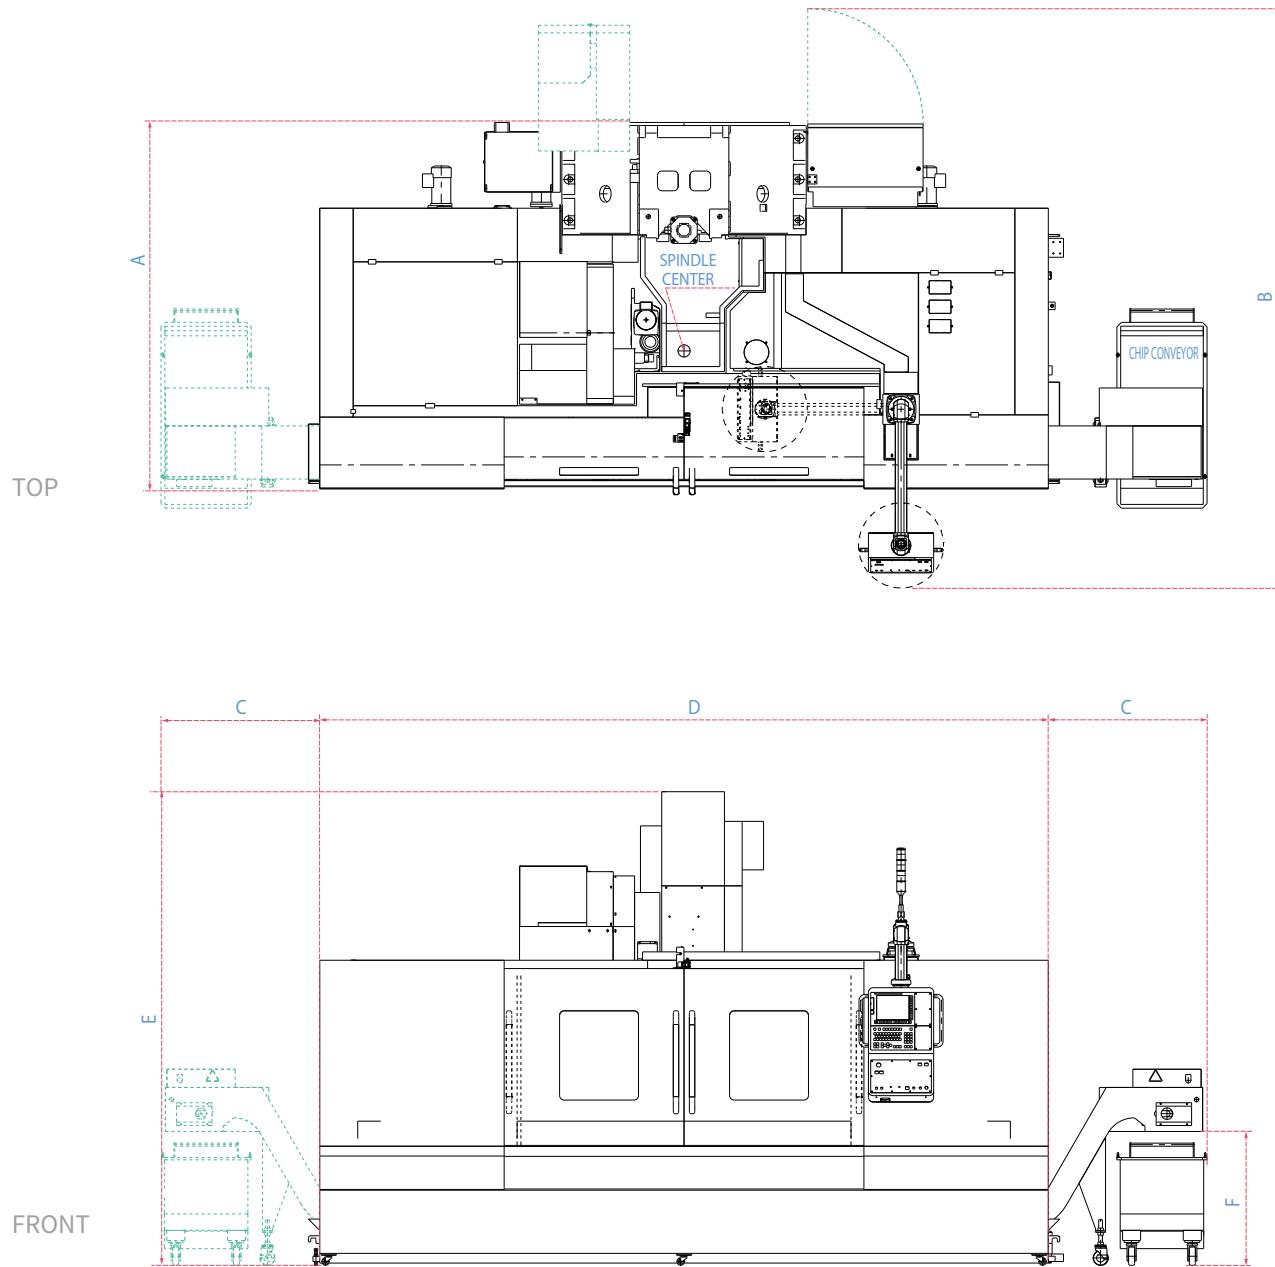

Model	A (Length)	B ^①	C ^②	D (Width)	E (Height)	F		
						SCRAPER	HINGED	SCREW
DNM 6700XL	2415 (95.1)	3820 (150.4)	1045 (41.1)	4800 (189.0)	3120 (122.8)	883 (34.8)	865 (34.1)	440 (17.3)

① Max. machine length (including electric cabinet door and operation panel swiveling)


② Additional width to accommodate the side chip conveyor. [] indicates the additional width required to accommodate a screw(auger)type chip conveyor.

* Some peripheral equipment can be placed in other places * Rear chipconveyor need discuss with sales person

TABLE


DNM 4500/L

Units : mm (inch)

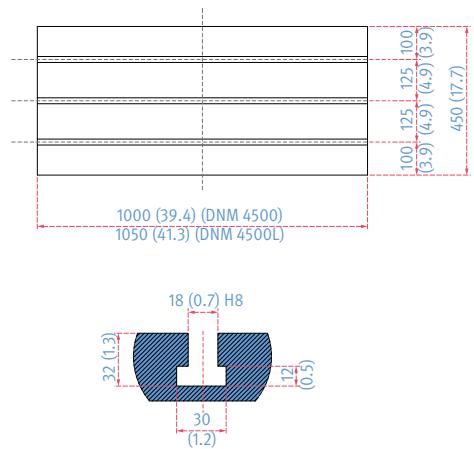


DNM 5700/L

Units : mm (inch)

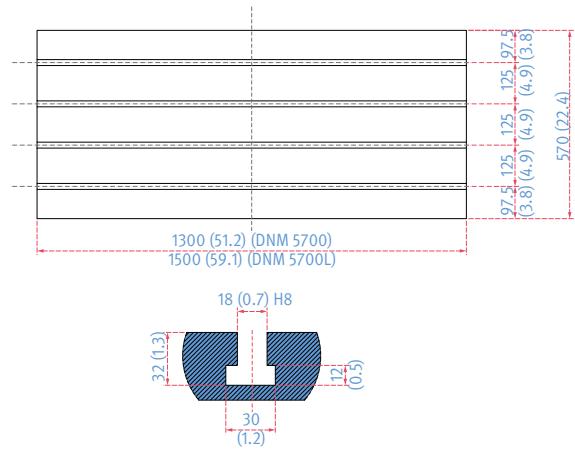


DNM 6700

Units : mm (inch)

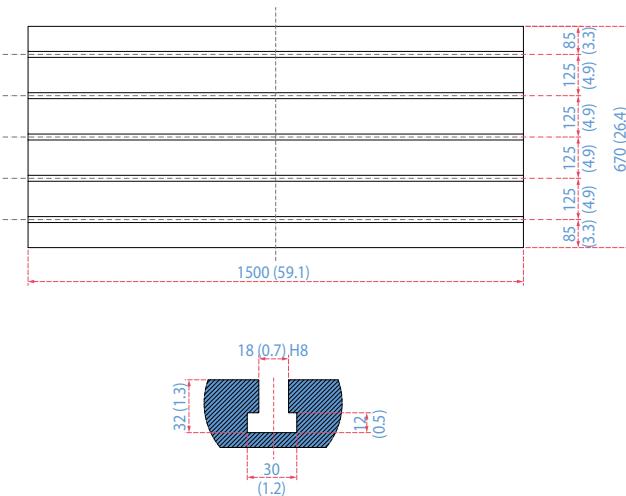


DNM 6700L

Units : mm (inch)

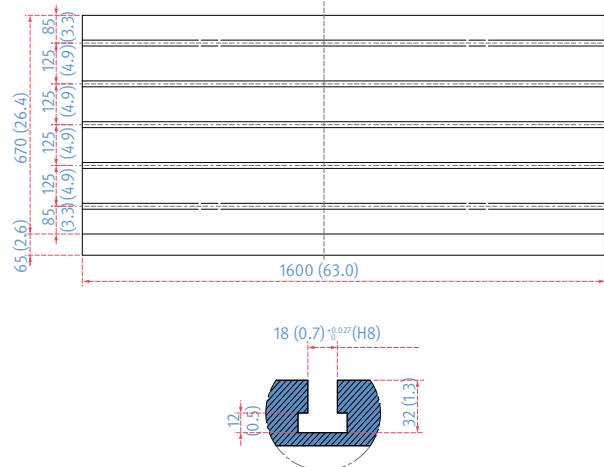

DNM 6700XL

Units : mm (inch)

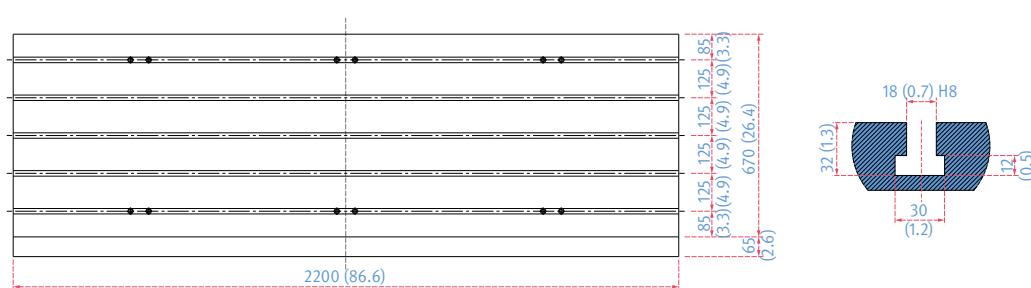

MACHINE SPECIFICATIONS

Description			Unit	DNM 4500	DNM 4500L	DNM 5700	DNM 5700L	DNM 6700	DNM 6700L	DNM 6700XL								
Travels	Travel distance	X axis	mm (inch)	800 (31.5)	910 (35.8)	1050 (41.3)	1300 (51.2)	1300 (51.2)	1500 (59.1)	2100 (82.7)								
		Y axis	mm (inch)	450 (17.7)		570 (22.4)		670 (26.4)										
		Z axis	mm (inch)	510 (20.1)		625 (24.6)												
	Distance from spindle nose to table top	mm (inch)	150~660 (5.9~26.0)				150~775 (5.9~30.5)											
Table	Table size	mm (inch)	1000 x 450 (39.4 x 17.7)	1050 x 450 (41.3 x 17.7)	1300 x 570 (51.2 x 22.4)	1500 x 570 (59.1 x 22.4)	1500 x 670 (59.1 x 26.4)	1600 x 670 (63.0 x 26.4)	2200 x 670 (86.6 x 26.4)									
	Table loading capacity	kg (lb)	600 (1322.8)		1000 (2204.6)		1300 (2866.0)											
	Table surface type	mm (inch)	T-SLOT (3-125(4.9) x 18(0.7) H8)		T-SLOT (4-125(4.9) x 18(0.7) H8)		T-SLOT (5-125(4.9) x 18(0.7) H8)											
Spindle	Taper	-	ISO #40															
	Max. spindle speed	Fanuc	r/min	8000 {8000*, 12000, 15000}														
		Siemens	r/min	12000 {15000}														
		Heidenhain	r/min	12000 {15000}														
		Mitsubishi	r/min	12000 {15000}														
	Max. Spindle power	Fanuc	kW (Hp)	18.5/11 (24.8/14.8) {15/11 (20.1/14.8)*, 18.5/11 (24.8/14.8), 18.5/11 (24.8/14.8)}				18.5/15 (24.8/20.1) {15/11 (20.1/14.8)*, 18.5/11 (24.8/14.8), 18.5/11 (24.8/14.8)}										
				16.5/11 (22.1/14.8) {16.5/11 (22.1/14.8)}				21.8/16.3 (29.2/21.9) {16.5/11 (22.1/14.8)}										
		Siemens	kW (Hp)	17/10 (22.8/13.4) {17/10 (22.8/13.4)}				32/15 (42.9/20.1) {17/10 (22.8/13.4)}										
				Mitsubishi kW (Hp)				18.5/11 (24.8/14.8)										
	Max. spindle torque	Fanuc	N·m (lbf-ft)	117.8 (86.9) {286 (211.1)*, 117.8 (86.9), 117.8 (86.9)}														
			N·m (lbf-ft)	141.3 (104.3) {141.3 (104.3)}						150.1 (110.7) {141.3 (104.3)}								
		Siemens	N·m (lbf-ft)	108.2 (79.9) {108.2 (79.9)}						203.7 (150.2) {108.2 (79.9)}								
			N·m (lbf-ft)	117.8 (86.9)														
Feedrates	Rapid traverse rate	X axis	m/min (ipm)	36 (1417.3)						30 (1181.1)								
		Y axis	m/min (ipm)	36 (1417.3)						30 (1181.1)								
		Z axis	m/min (ipm)	30 (1181.1)														
Automatic Tool Changer	Type of tool shank	-	BT 40 {CAT 40 / DIN 40}															
	Pull stud	-	PS806 {Modified DIN / DIN 69872 #40}															
	Tool storage capa.	ea	30 {40, 60}															
	Max. tool diameter	Continous	mm (inch)	80 (3.1) {76 (3.0)}														
		Without Adjacent Tools	mm (inch)	125 (4.9)														
	Max. tool length	mm (inch)	300 (11.8)															
	Max. tool weight	kg (lb)	8 (17.6)															
	Max. tool moment	N·m (ft-lbs)	5.88 (4.3)															
	Tool selection		MEMORY RANDOM															
	Tool change time (Tool-to-tool)	sec	1.2															
Power source	Electric power supply (rated capacity)	kVA	29.5						38.1 {33.0**}	40 {35}* 10000 (22045.9)								
	Compressed air supply	MPa (psi)	0.54 (78.3)															
Tank capacity	Coolant tank capacity	L (gal)	260 (68.7)	285 (75.3)	310 (81.9)	350 (92.5)	325 (85.9)	430 (113.6)	440 (116.2)									
Machine Dimensions	Height	mm (inch)	2985 (117.5)						3120 (122.8)									
	Length	mm (inch)	2158 (85.0)		2413 (95.0)		2597 (102.2)		2970 (116.9)									
	Width	mm (inch)	2615 (103.0)	2701 (106.3)	3110 (122.4)	3350 (131.9)	3350 (131.9)	3650 (143.7)	4800 (189.0)									
	Weight	kg (lb)	5000 (11023.0)	5500 (12125.2)	6500 (14329.8)	7000 (15432.1)	8500 (18739.0)	9000 (19841.3)	10000 (22045.9)									
Control	NC system	-	DN Solutions Fanuc i Plus / SIEMENS S828D / HEIDENHAIN TNC620 / MITSUBISHI M80A															

* { } : Optional * 8000 r/min High torque version(FANUC only) ** Power capacity of 8000 r/min high torque and 12000 r/min spindle

WHY DN SOLUTIONS

The DN Solutions promise, MACHINE GREATNESS, has two important meanings. The first is simple: DN Solutions makes great machines. The second is a challenge to our end-users. With a product line that is this comprehensive, accurate and reliable, we equip our customers to machine greatness. The big question: **Why should you choose DN Solutions over other options?**

Here's why...



MACHINE GREATNESS™



WHAT YOU MAKE AND HOW YOU MAKE IT MATTERS—SO MAKE IT
GREAT WITH DN SOLUTIONS.

UNBEATABLE MACHINES

You won't find a more comprehensive range or a better combination of value, performance and reliability anywhere else.

READYLY AVAILABLE - ANYWHERE IN THE WORLD

Machining centres (including 5-axis machines), lathes, multi-tasking turning centres and mill-turn machines, and horizontal borers with best-in-class specifications are all available...ready to install.

ROBUST PRODUCT LINE

We offer an impressive range of machine models and hundreds of configurations. Whatever your machining needs and requirements, there's a DN Solutions for you.

EXPERT SERVICE

Our dedicated, experienced and knowledgeable team is totally committed to improving your productivity, growth and success.

CUSTOMER SUPPORT AND SERVICES

We're there for you whenever you need us.

We help our customers operate at maximum efficiency by providing them with a range of tried, tested and trusted services - from pre-sales consultancy to post-sales support.




FIELD SERVICES

- On-site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair service


PARTS SUPPLY

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service

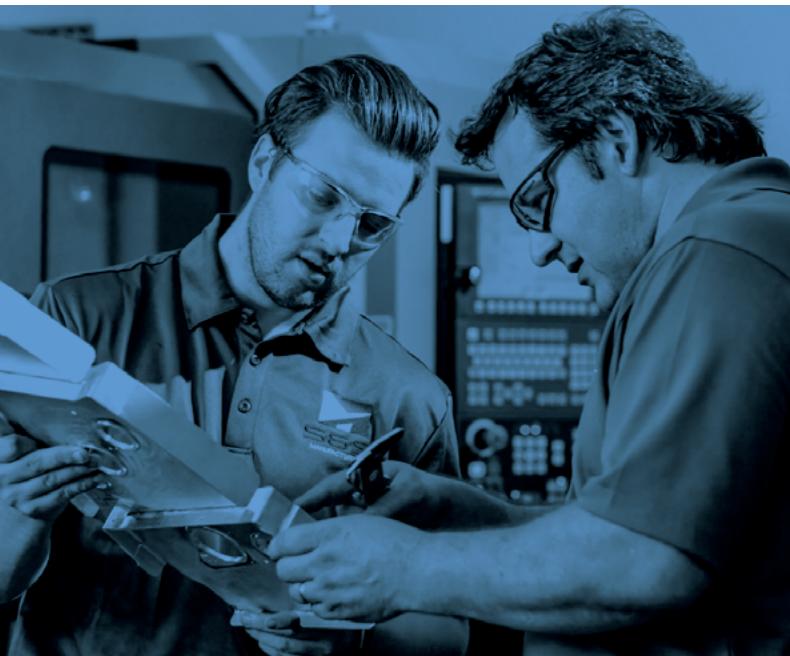

TRAINING

- Programming, machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering

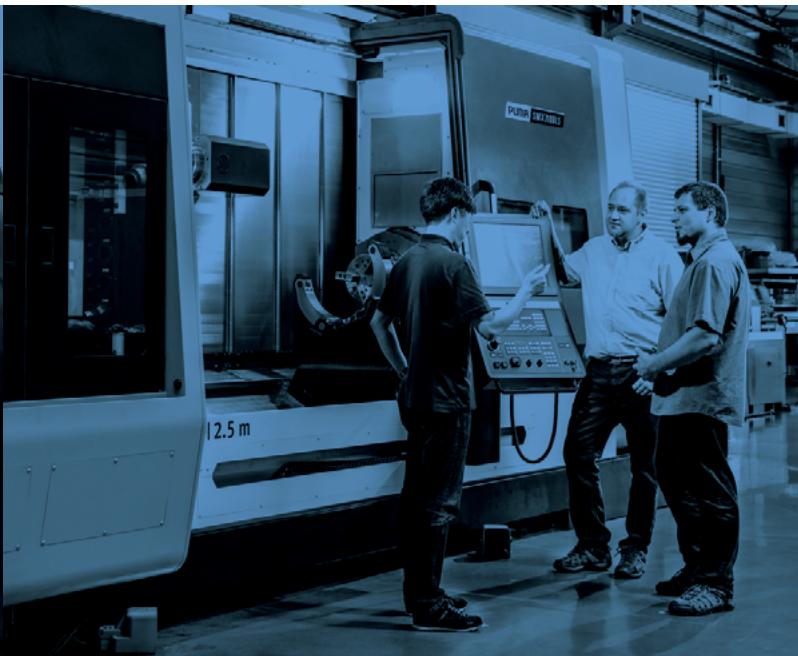

TECHNICAL SUPPORT

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy

RESPONDING TO CUSTOMERS **ANYTIME, ANYWHERE**

DN Solutions Global Network

DN Solutions provides systems-based professional support services, before and after the machine tool sale, by responding quickly and efficiently to customers. By supplying spare parts, product training, field service and technical support, we provide the expert care, attention and assistance our customers expect from a market leader.



Global sales and service support network

4	Corporations	
156	Dealer networks	
51	Technical centers Technical Center, Sales Support, Service Support, Parts Support	
200	Service posts	
3	Factories	



dn-solutions.com

Head Office

22F T Tower, 30, Sowol-ro 2-gil
Jung-gu, Seoul, Korea, 04637
Tel +82-2-6972-0370/0350
Fax+82-2-6972-0400

DN Solutions America

19A Chapin Road, Pine Brook
New Jersey 07058, United States
Tel: +1-973-618-2500
Fax:+1-973-618-2501

DN Solutions Europe

Emdener Strasse 24, D-41540
Dormagen, Germany
Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

DN Solutions India

No.82, Jakkuar Village
Yelahanka Hobil, Bangalore-560064
Tel: + 91-80-2205-6900
E-mail: india@dncompany.com

DN Solutions China

Room 101,201,301, Building 39 Xinzhan
Highway No.258 Songjiang District
China Shanghai (201612)
Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

Sales inquiry

sales@dncompany.com

* For more details, please contact DN Solutions.

* Specifications and information contained within this catalogue may be changed without prior notice.